


LED STRIP LIGHT

10w/m

Medium Brightness



- 5 Year Warranty
- CRI >90+
- Dimmable
- Heat bonding adhesive tape
- 90-100 lumens per watt
- High efficiency LED chip
- Cuttable every 25mm (12V) or 50mm (24V)



Call us now on (03) 8521-6470
to quote your project big or small

IDEAL FOR:

- Soft illumination
- Creating ambience
- Decorative room lighting

INSTALL ON:

- Pathways
- Corridors
- Joinery
- Stair treads
- Handrails





LED STRIP LIGHT (Medium Brightness) 10w/m

LED TYPE: 2835

12v DC

IP65



Model Number	JB-SL12V-04-PM	JB-SL12V-05-PM	JB-SL12V-06-PM
Colour Temperature	3000K	4000K	6000K
Chips per metre	120 LEDS	120 LEDS	120 LEDS
Lumens Flux	900lm	950lm	1000lm
Dimensions	8mm x 2.8mm	8mm x 2.8mm	8mm x 2.8mm
Cutting Increments	25mm	25mm	25mm
IP Rating	IP65	IP65	IP65

LED TYPE: 2835

24v DC

IP65



Model Number	JB-SL24V-04-PM	JB-SL24V-05-PM	JB-SL24V-06-PM
Colour Temperature	3000K	4000K	6000K
Chips per metre	120 LEDS	120 LEDS	120 LEDS
Lumens Flux	900lm	950lm	1000lm
Dimensions	8mm x 2.8mm	8mm x 2.8mm	8mm x 2.8mm
Cutting Increments	50mm	50mm	50mm
IP Rating	IP65	IP65	IP65

LED TYPE: 2835


24v DC

IP20



Model Number	JB-SL24V-23-PM	JB-SL24V-24-PM	JB-SL24V-25-PM
Colour Temperature	3000K	4000K	6000K
Chips per metre	120 LEDS	120 LEDS	120 LEDS
Lumens Flux	900lm	950lm	1000lm
Dimensions	8mm x 1.8mm	8mm x 1.8mm	8mm x 1.8mm
Cutting Increments	50mm	50mm	50mm
IP Rating	IP20	IP20	IP20

Dimensions

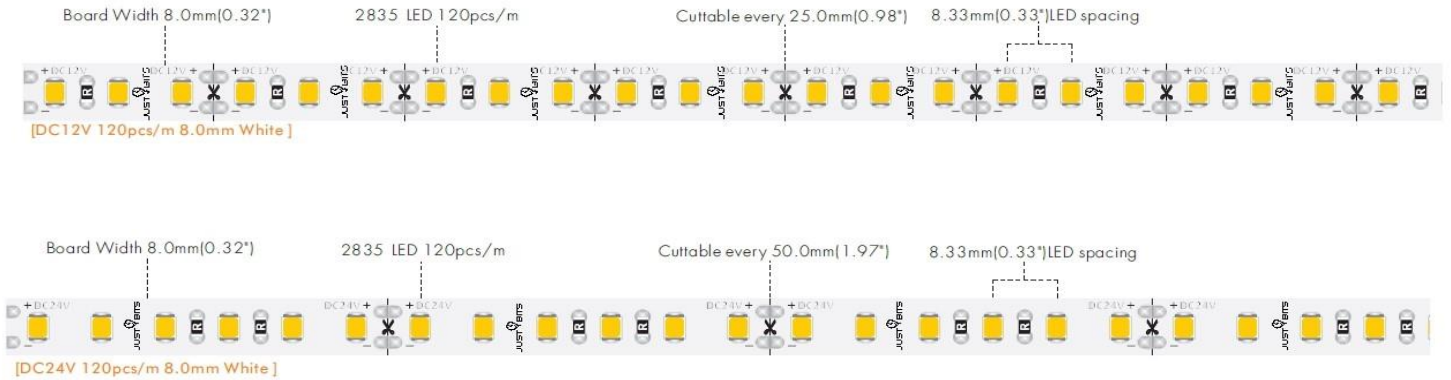

Installation

1. The mounting surface must be clean, dry and free from dust or grease
2. Carefully unroll the LED strip from the reel
3. Measure and cut the LED strip to the required length (only cut at the pre-defined cutting interval)
4. Remove the self-adhesive backing tape from the LED strip carefully. **DO NOT remove all the backing tape at once otherwise the LED strip may become entangled**
5. Stick down the LED strip to the mounting surface by pressing down gently on the LED strip. **Do not apply excessive force to the LED strip**, otherwise the LED's can components may become damaged
6. Once the LED strip has been mounted, it is then ready to be wired and powered

Notes

1. It is not recommended to power a continuous length longer than (5m for 12V) or (10m for 24V) LED strip due to voltage drop
2. Do not exceed the rated input voltage, always ensure a regulated power supply is used

Specification subject to change without prior notice. Last updated 01/08/2021